


DEGERtraker 300EL

Dual-axis, active tracking system

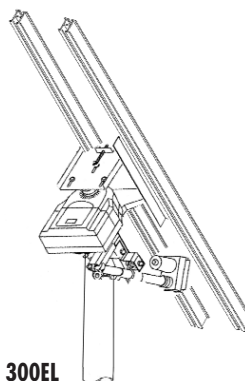

DEGERtraker 300EL

DEGERtraker 300EL for hobby and leisure time

- Areas of application:**
- in open spaces and on buildings.
 - for installation with different mast lengths.
 - For all current modules.


	300EL
For solar yield	100 - 400 Wp
Module area up to	3 m ²
Rotation angle east-west	200°
Elevation inclination angle	15° ... 90°
Control unit	DEGERconnector
Energy converter	I or III
East - west drive	drive integrated in the power head
Elevation drive	linear drive, 200 mm stroke path
Internal power consumption:	
control mode	0.3 Watt
during drive operation approx.	5 Watts
Power consumption per year approx.	3 kWh
Mast length	mast not included, Ø 90mm
Weight (without mast)	30 kg
Maintenance	maintenance-free
Geographic regions	25th ... 60th degree of latitude
Art.no.:	1030001

Project-specific assimilation to regional provisions.
Subject to technical changes for future improvements.

Scope of delivery:

Complete dual-axis tracking system, aluminium solar module carrier system to fit the respective module type, DEGERconnector control electronics with energy converter for extremely economical operation, construction plan.

Available at any time: From your solar equipment retailer.



DEGERenergie
Tracking Systems

DEGERenergie GmbH • 72160 Horb/Germany
info@DEGERenergie.com • www.DEGERenergie.com